



# **SERVICE BULLETIN**

## **HYDRAULIC CYLINDER LEAK - ECO Ramp**

Manufactured & Distributed exclusively by SUPER LAWN TRUCKS.

1610 Peach Parkway  
Fort Valley, GA 31030  
Phone: (478) 822-9704  
Toll Free: (866) 923-0027  
Fax: (478) 822-9707

Visit our website at:  
<http://www.superboxtruckramps.com>  
<http://www.superlawntrucks.com>

## **Supplies Needed**



TFE Paste or sealer



Creeper





5/16" Allen Wrench

Step 1: Open rear door. This allows the hydraulic fluid to flow down the cylinder.



Step 2: Using a creeper, slide under the truck and locate the hydraulic cylinder. With caution, loosen the plug, using a 5/16" allen wrench. Wait until you feel the pressure released.

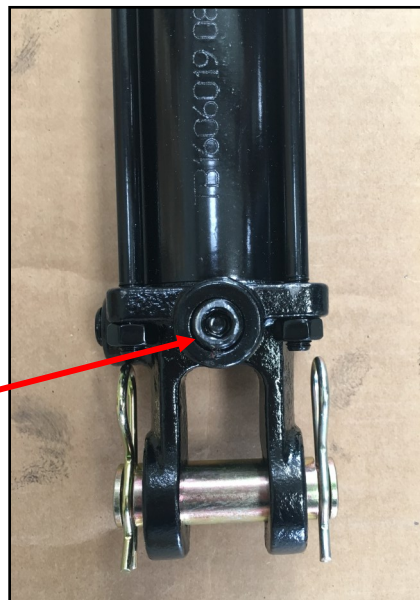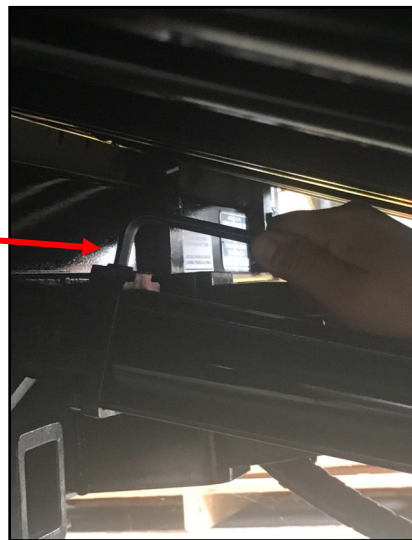

### Step 3: Remove plug



Step 4: Apply Teflon Tape or sealer to the plug and insert it back into the cylinder. Using an allen wrench, screw the plug until it is tight. Once inserted, test the ramp by raising, and lowering the ramp multiple times to insure leak has been fixed.

